

Challenger Controlled Drug Safe: Model CDS1400



Our Drug Safes are designed and manufactured in New Zealand to Ministry of Health (MoH) requirements.

They are finished in a powder coat which includes an anti-bacterial additive known as Clinikill® to further enhance their operation in sterile clinical environments.

We offer four standard models which vary in height from 350mm, 600mm, 800mm to 1400mm high. We can also custom design Drug Safe dimensions to meet your specific requirements.

Mounting position requirements for Drug Safes under MoH requirements vary based on the size of the selected Drug Safe. We predrill mounting positions for our Drug Safes to meet MoH requirements and we can also drill custom mounting positions to suit your building structure.

Our Drug Safes come standard with a right hinge but they can also be supplied with a left hinge on request.

Locking is achieved using Australian Ross key locks as standard. For clients with automated building access control systems we also offer magnetic locks which can be integrated into your building management system.

Features:

- Body 6mm Plate Steel
- Door 6mm Plate Steel
- Hinges protected by internal "dogging bar"
- Door strengthened with "strongback bar"
- Rebated Door
- 5 x adjustable shelves

Locking:

- 2 x Ross 600 6 Lever Lock (standard)
- Magnetic or Electronic Lock (optional)

Colour:

- Powder coated with Clinikill® Anti-Bacterial additive
- Colour: Silver quill

Warranty:

- 24 months parts and labour

As our policy is one of consistent improvement, we reserve the right to alter any of the above specifications without notice and without incurring any obligation.



Contact Us

Central Otago: 03 445 3500

Dunedin: 03 477 7711

Challenger Controlled Drug Safe: Model CDS1400

Specifications:

Hinging of Door: Standard Right Hand.

(Left hand on request)

Shelf Quantity: 5 x adjustable.

Product Standard: NZ MoH requirements.

Basic Lock Configuration:

2 x Ross 600 6 Lever Locks (standard)

Magnetic lock option.

Tecnosicurezza Electronic Lock options

Height: 1400mm (External), 1388mm (Internal)

Width: 450mm (**W** -External), 438mm (**(w)** -Internal)

Depth: 350mm (**D** -External), 338mm (**(d)** -Internal)

**Tolerances on Dimensions: as shown or +/- 2mm*

Door at 90° (**OD): 790mm**

Door at 180° (**OW): 875mm**

Door Swing Radius= (**S): 444mm**

Volume: 205 Litres

Weight: 142 Kgs

**Tolerances on Weight: +/- 10%*

Door Construction:

6mm Mild Steel


Body Construction:

6mm Mild Steel

Bolt Down Positions:

14 x back

4 x base

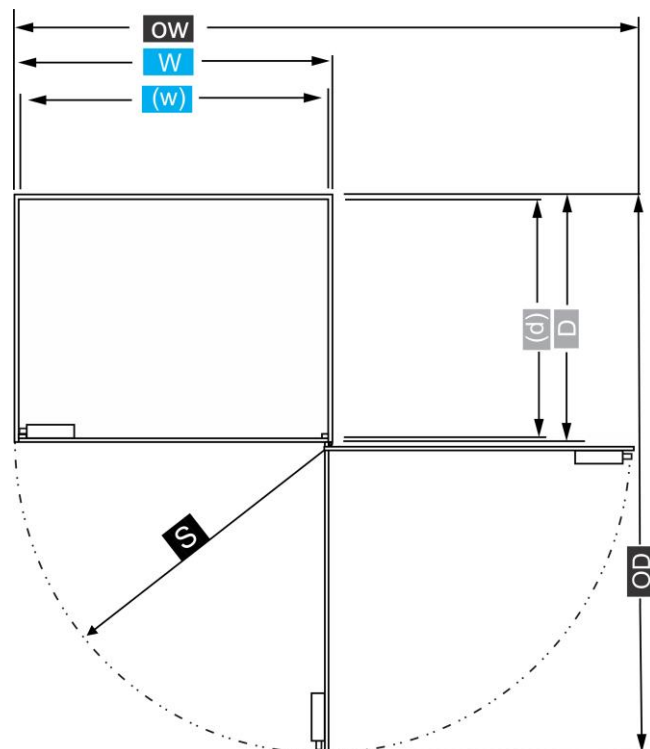

As our policy is one of consistent improvement, we reserve the right to alter any of the above specifications without notice and without incurring any obligation.

Contact Us

Central Otago: 03 445 3500

Dunedin: 03 477 7711